

PB_OLD20190502

"PB" PLATEFORME MONO CAPTEUR



Plateforme électronique mono capteur, de faible et moyenne portée avec plateau en acier INOX.

- Résolution jusqu'à 3000d.
- OIML R60 C3.
- Protection IP65.


La solution idéale pour
les applications industrielles
évoluées

CARACTERISTIQUES TECHNIQUES

- Fonctionnement avec un capteur 350 Ohm à appui central en aluminium, homologué selon la norme OIML R60 C3 (3000 divisions), degré de protection IP65.
- Structure de support tubulaire en acier peint de couleur bleu. Pieds réglables et niveau à bulle.
- Plateau de charge en acier inox.
- Alimentation max 15 Vdc.
- Câble de 3m pour la connexion à l'indicateur de poids.
- Sur demande :
 - Homologation CE-M 3000e.
 - Colonne et support pour indicateur de poids.

SUPPORTS ET COLONNES

- Exemple d'utilisé avec support, colonne solide ou colonne au sol.

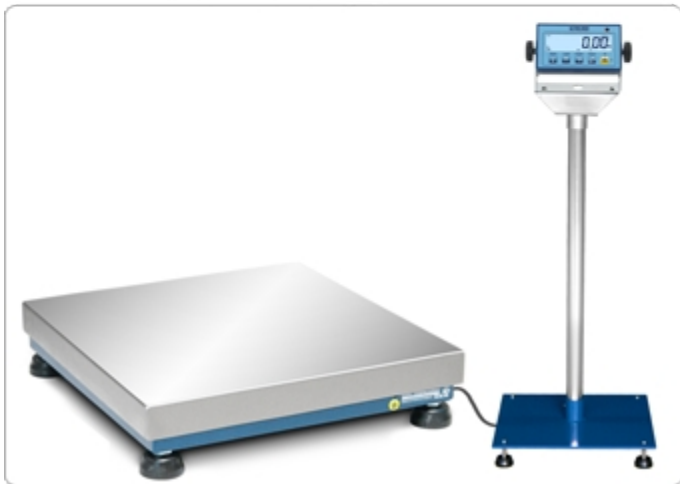

VERSIONS

Versions disponibles

	Codice	l x w x h (mm)	Max (kg)	d (g)	 (g)*	d HR (g)*
	<u>PBT6</u>	300x300x130	6	1	2	0,5
	<u>PBT15</u>	300x300x130	15	2	5	1
	<u>PBT30</u>	300x300x130	30	5	10	2
	<u>PBQ30</u>	400x400x140	30	5	10	2
	<u>PBQ60</u>	400x400x140	60	10	20	5
	<u>PBQ150</u>	400x400x140	150	20	50	10
	<u>PBX60</u>	600x600x165	60	10	20	5
	<u>PBX150</u>	600x600x165	150	20	50	10
	<u>PBX300</u>	600x600x165	300	50	100	20
	<u>PBE300</u>	800x800x170	300	50	100	20



PBE600

800x800x170

600

100

200

50

(*) Ces divisions sont seulement obtenues avec les options définies ci-dessous, en combinaison avec indicateur de poids Dini Argeo.



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE